

VALID FROM 1 APRIL 2018

# **GEBERIT SILENT-PP PRODUCT GUIDE AND PRICE LIST**

**KNOW  
HOW**  
INSTALLED\*



# Geberit Silent-PP

<b>Preliminary remarks</b> .....	<b>6</b>
<b>Pipes</b> .....	<b>7</b>
<b>Fittings</b> .....	<b>8</b>
Bends .....	8
Branch fittings .....	10
Reducers.....	17
Access pipes.....	19
<b>Connections</b> .....	<b>20</b>
Push-in connections .....	20
Claw connections .....	21
Adaptors on other product materials .....	22
<b>Waste fittings</b> .....	<b>23</b>
Connection bends .....	23
Straight connectors.....	25
<b>Accessories</b> .....	<b>26</b>
Air admittance valves .....	26
Pipe brackets .....	27
Sealings.....	28
Seals.....	29
Protection covers .....	30
Consumables .....	30
<b>Appendix</b> .....	<b>31</b>
Abbreviation .....	31
Sales and delivery conditions .....	32
Index.....	35

## Preliminary remarks

### Introduction to Geberit Silent-PP

Geberit Silent-PP is the perfect commercial soil & waste and drainage system. With robust pipes, available in common diameters, from 32 mm to 160 mm, and a comprehensive range of fittings and to suit most installations.

Whether it be in a residential complex, a hotel or in a meeting room, noisy discharge pipes are annoying - a problem that is easily eliminated with the Geberit Silent-PP waste and drainage system. These pipes and fittings, optimised as they are with respect to sound insulation and hydraulics, are suitable for both discharge stacks and floor connections and ensure quiet and effective drainage in every kind of building.

### Benefits of Geberit Silent-PP

#### Award winning pushfit design

Geberit Silent-PP is a design award winning pushfit drainage system offering very simple and fast assembly: Just push the components together and rotate to align them. In addition to its low-noise, optimised wastewater volume flow, the new concept is characterized by several design elements: The reference nubs and stop ring take the guess work out of aligning the fittings properly and getting the correct insertion depth. The four laterally extending ribs serve to create a good grip when inserting one fitting into another. The flattened ridge along the direction of flow highlights the product brand and item details to help with identification later.

#### Effective sound insulation

Geberit Silent-PP is made from mineral-reinforced polypropylene, improving the physical properties of the material and achieving acoustics optimisation, effectively reducing the natural vibrations and noise.

#### Clean installation

No chemicals used in the installation process

#### Chemical resistant

Resistant to a wide range of chemicals

#### Temperature and UV resistant

Robustly resistant to hot and cold temperatures and UV light

#### Impact resistant

Flexible materials absorb impact

#### Experienced

More than 60 years of practical experience in drainage technology

### Always consider

When fitting an acoustic installation, it is not just the drainage system which needs careful consideration. Try to have as few offsets as possible to reduce the amount of impact zones, thus decreasing the sound. If an offset is necessary, use 2x 45degree bends instead.

Ensure you decouple the whole installation away from the construction of the building. Use rubber lined brackets to absorb the vibrations, as well as sound insulation for pipes coming into contact with the walls and floors.

### Technical support

Available to answer your email & telephone enquiries. Our technical team can take plan drawings, schematics and any other relevant installation information and they will create a take-off for your project free of charge.

If you require any technical assistance, please contact the technical department on 01926 516800, or email [technical@geberit.co.uk](mailto:technical@geberit.co.uk).



product  
design  
award



2009



# Pipes

New

## Geberit Silent-PP pipe with one socket



### Application purposes

- For draining off waste water within buildings
- For buried discharge pipes within building structures

### Characteristics

- Acoustically optimised
- Three-layer pipe
- Pipe, white interior

- Seal made of EPDM
- Suitable for being stored outside for two years

### Technical data


Installation temperature	-10 - +40 °C
Material	PP-C / PP-MD / PP-C
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	s [mm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
<b>L / length: 100 cm</b>							
390.004.14.1	30	32	2	650	10		4.78
390.104.14.1	40	40	2	400	10		4.36
390.204.14.1	50	50	2	240	10		4.73
390.304.14.1	70	75	2.6	144	8	1	8.14
390.404.14.1	90	90	3.1	90	6		12.23
390.504.14.1	100	110	3.6	64	4		13.76
390.604.14.1	125	125	4.2	48	4		20.24
390.704.14.1	150	160	5.2	36	4	1	30.27
<b>L / length: 150 cm</b>							
390.005.14.1	30	32	2	650	10		7.66
390.105.14.1	40	40	2	400	10		7.69
390.205.14.1	50	50	2	240	10		7.82
390.305.14.1	70	75	2.6	144	8		11.99
390.405.14.1	90	90	3.1	90	6		17.12
390.505.14.1	100	110	3.6	64	4		19.21
390.605.14.1	125	125	4.2	48	4		27.47
390.705.14.1	150	160	5.2	36	4		41.40
<b>L / length: 200 cm</b>							
390.006.14.1	30	32	2	650	10		9.33
390.106.14.1	40	40	2	400	10		9.40
390.206.14.1	50	50	2	240	10		10.12
390.306.14.1	70	75	2.6	144	8		15.72
390.406.14.1	90	90	3.1	90	6		23.04
390.506.14.1	100	110	3.6	64	4		25.84
390.606.14.1	125	125	4.2	48	4		37.43
390.706.14.1	150	160	5.2	36	4		56.24
<b>L / length: 300 cm</b>							
390.007.14.1	30	32	2	650	10		13.08
390.107.14.1	40	40	2	400	10		13.47
390.207.14.1	50	50	2	240	10		15.64
390.307.14.1	70	75	2.6	144	8		23.25
390.407.14.1	90	90	3.1	90	6		33.02
390.507.14.1	100	110	3.6	64	4		37.12
390.607.14.1	125	125	4.2	48	4		52.25
390.707.14.1	150	160	5.2	36	4		80.04

Available as of April 2018

New

## Geberit Silent-PP pipe with two sockets



### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

### Characteristics

- Acoustically optimised
- Three-layer pipe
- Pipe, white interior

- Seal made of EPDM
- Suitable for being stored outside for two years

### Technical data

Installation temperature	-10 - +40 °C
Material	PP-C / PP-MD / PP-C
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	s [mm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
<b>L / length: 200 cm</b>						
390.013.14.1	30	32	2	650	10	11.20
390.113.14.1	40	40	2	400	10	11.31
390.213.14.1	50	50	2	240	10	12.55
390.313.14.1	70	75	2.6	144	8	18.89
390.413.14.1	90	90	3.1	90	6	26.21
390.513.14.1	100	110	3.6	64	4	31.59
390.613.14.1	125	125	4.2	48	4	50.56
<b>L / length: 300 cm</b>						
390.014.14.1	30	32	2	650	10	15.69
390.114.14.1	40	40	2	400	10	17.65
390.214.14.1	50	50	2	240	10	19.47
390.314.14.1	70	75	2.6	144	8	27.47
390.414.14.1	90	90	3.1	90	6	37.75
390.514.14.1	100	110	3.6	64	4	45.49
390.614.14.1	125	125	4.2	48	4	70.45


Available as of April 2018

# Fittings

## Bends

**New**

### Geberit Silent-PP bend



#### Application purposes

- For draining off waste water within buildings
- For buried discharge pipes within building structures

#### Characteristics

- Acoustically optimised
- Seal made of EPDM

#### Technical data

Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	X [cm]	Z [cm]	Z1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
<b>arc / angle: 15°</b>									
390.020.14.1	30	32	5	0.6	1	2000	50	10	2.06
390.120.14.1	40	40	5.4	0.7	1.1	1200	50	10	2.09
390.220.14.1	50	50	5.8	0.7	1.1	1200	100	10	2.67
390.320.14.1	70	75	6.5	0.9	1.5	400	50	10	4.15
390.420.14.1	90	90	7.3	1.2	1.7	320	40	10	5.86
390.520.14.1	100	110	8.2	1.4	2	160	40	10	6.37
390.620.14.1	125	125	8.8	1.4	2.3	120		10	12.18
390.720.14.1	150	160	9.7	1.7	2.6	60		5	18.94
<b>arc / angle: 30°</b>									
390.021.14.1	30	32	5.2	0.8	0.9	2000	50	10	2.06
390.121.14.1	40	40	5.7	0.9	1	1200	50	10	2.09
390.221.14.1	50	50	6.2	1.1	1	1200	100	10	2.43
390.321.14.1	70	75	7	1.5	1.5	400	50	10	4.15
390.421.14.1	90	90	7.9	1.8	1.7	320	40	10	5.86
390.521.14.1	100	110	9	2.1	2.2	160	40	10	6.37
390.621.14.1	125	125	9.8	2.4	2.5	120		10	12.18
390.721.14.1	150	160	11	3	2.8	60		5	18.94
<b>arc / angle: 45°</b>									
390.022.14.1	30	32	5.5	1	1.1	2000	50	10	1.88
390.122.14.1	40	40	6	1.2	1.3	1200	50	10	1.80
390.222.14.1	50	50	6.5	1.5	1.4	1200	100	10	2.11
390.322.14.1	70	75	7.6	2	2.1	400	100	10	3.96
390.422.14.1	90	90	8.5	2.4	2.5	320	40	10	5.44
390.522.14.1	100	110	9.7	3	2.9	160	40	10	5.39
390.622.14.1	125	125	10.7	3.3	3.3	120		10	12.18
390.722.14.1	150	160	12.2	4.2	4	60		5	18.94
<b>arc / angle: 67.5°</b>									
390.023.14.1	30	32	5.9	1.5	1.5	2000	50	10	2.27
390.123.14.1	40	40	6.5	1.8	1.8	1200	50	10	2.32
390.223.14.1	50	50	7.2	2.1	2.1	1200	100	10	3.22
390.323.14.1	70	75	8.6	3	3	400	50	10	5.60
390.423.14.1	90	90	9.7	3.6	3.5	200	50	10	6.26
390.523.14.1	100	110	11.2	4.4	4.3	160	40	10	6.84
390.623.14.1	125	125	12.3	4.9	4.9	80		10	17.75
390.723.14.1	150	160	14.3	6.2	6.1	40		5	29.43
<b>arc / angle: 87.5°</b>									
390.024.14.1	30	32	6.4	1.9	2	2000	50	10	2.03
390.124.14.1	40	40	7.1	2.3	2.5	1200	50	10	2.09
390.224.14.1	50	50	7.9	2.8	3	1200	100	10	2.67
390.324.14.1	70	75	9.7	4.1	4.2	400	50	10	5.47
390.424.14.1	90	90	11	4.9	4.8	200	50	10	5.86
390.524.14.1	100	110	12.8	6	6	160	40	10	6.23
390.624.14.1	125	125	14.2	6.8	6.7	80		10	17.75
390.724.14.1	150	160	16.6	8.5	8.4	40		5	29.43


Available as of April 2018

Prices exclusive of VAT

## Branch fittings

New

### Geberit Silent-PP branch fitting 45°



#### Application purposes

- For draining off waste water within buildings
- For buried discharge pipes within building structures

#### Characteristics

- Acoustically optimised
- Seal made of EPDM

#### Technical data

Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)



Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.030.14.1	30 / 30	32	32	9.4	1	4	4	1200	50	10		4.23
390.130.14.1	40 / 30	40	32	9.7	0.6	4.6	4.4	800	50	10		4.31
390.131.14.1	40 / 40	40	40	9.8	1.2	5	5	800	50	10		4.36
390.230.14.1	50 / 30	50	32	10	0.1	5.3	4.9	480	60	10		5.23
390.231.14.1	50 / 40	50	40	10.2	0.7	5.8	5.6	480	60	10		5.47
390.232.14.1	50 / 50	50	50	11.4	1	6.3	6.3	480	60	10		4.89
390.331.14.1	70 / 40	75	40	12	0.6	7.6	7	200	25	5		7.56
390.332.14.1	70 / 50	75	50	13.4	0.1	8.1	7.6	200	25	5		6.89
390.333.14.1	70 / 70	75	75	15	1.9	9.4	9.4	200	25	5		7.56
390.432.14.1	90 / 50	90	50	13	0.6	9.1	8.4	200	50	10		11.39
390.433.14.1	90 / 70	90	75	17.5	1.2	10.4	10.2	120	30	10		11.73
390.434.14.1	90 / 90	90	90	19.6	2.2	11.3	11.3	120	30	10		11.60
390.531.14.1	100 / 40	110	40	13.4	2.2	10.1	8.8	120	30	5		12.76
390.532.14.1	100 / 50	110	50	14.8	1.5	10.6	9.5	120	30	5		12.42
390.533.14.1	100 / 70	110	75	18.3	0.2	11.9	11.2	80		10		12.76
390.534.14.1	100 / 90	110	90	20.3	1.3	12.6	12.2	80		10		12.60
390.535.14.1	100 / 100	110	110	23.3	2.7	13.8	13.8	80		10		11.94
390.634.14.1	125 / 90	125	90	21	0.6	13.6	12.9	80		10		29.09
390.635.14.1	125 / 100	125	110	23.7	2.1	14.7	14.3	40		10		29.09
390.636.14.1	125 / 125	125	125	25.9	3.1	15.4	15.4	40		10		43.88
390.735.14.1	150 / 100	160	110	24.5	0.4	17.2	16.1	40		5	1	45.33
390.736.14.1	150 / 125	160	125	26.6	1.4	17.9	17.1	40		5	1	59.97
390.737.14.1	150 / 150	160	160	31.5	3.9	19.6	19.5	20		5	1	68.34

Available as of April 2018



New

## Geberit Silent-PP double branch fitting 45°



### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

### Characteristics

- Acoustically optimised
- Seal made of EPDM

### Technical data


Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	H [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
390.469.14.1	90 / 50 / 50	90	50	50	13.9	9.1	9.1	8.4	120	10	21.45
390.569.14.1	100 / 50 / 50	110	50	50	14.8	10.6	10.6	9.5	80	10	21.45

Available as of April 2018

New

## Geberit Silent-PP branch fitting 87.5°, swept-entry



### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

### Characteristics

- Acoustically optimised
- Swept entry
- Seal made of EPDM

### Technical data


Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.454.14.1	90 / 90	90	90	17.7	6.7	7	4.9	120	30	10	12.18
390.554.14.1	100 / 90	110	90	18.6	6.8	8.1	5	80		10	12.36
390.555.14.1	100 / 100	110	110	21.2	8.2	7.7	6.1	80		10	12.36

Available as of April 2018

New

## Geberit Silent-PP branch fitting 87.5°



### Application purposes

- For draining off waste water within buildings
- For buried discharge pipes within building structures

### Characteristics

- Acoustically optimised
- Seal made of EPDM

### Technical data



Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.046.14.1	30 / 30	32	32	8.2	1.7	2.1	2.1	1200	50	10		4.23
390.147.14.1	40 / 40	40	40	9.2	2.2	2.2	2.2	800	50	10		4.36
390.247.14.1	50 / 40	50	40	9.5	2.2	2.8	2.2	480	60	10		5.47
390.248.14.1	50 / 50	50	50	10.5	2.7	2.8	2.8	480	60	10		5.47
390.347.14.1	70 / 40	75	40	10.4	2.3	4.2	2.6	200	25	5		7.56
390.348.14.1	70 / 50	75	50	11.4	2.8	4.2	3.1	200	25	5		7.56
390.349.14.1	70 / 70	75	75	13.9	4	4.3	4.3	200	25	5		7.56
390.448.14.1	90 / 50	90	50	12.1	2.8	4.9	3.2	200	50	10		11.60
390.449.14.1	90 / 70	90	75	14.6	4	5.1	4.5	160	40	10		11.73
390.547.14.1	100 / 40	110	40	12.4	2.7	6	2.9	120	30	5		12.60
390.548.14.1	100 / 50	110	50	12.9	2.8	6	3.2	120	30	5		12.60
390.549.14.1	100 / 70	110	75	15.4	4	6.1	4.5	120	30	5		12.76
390.650.14.1	125 / 90	125	90	17.1	4.6	6.9	5.2	80		10		29.09
390.651.14.1	125 / 100	125	110	21.3	6.6	7.8	7.3	80		10		29.09
390.652.14.1	125 / 125	125	125	20.6	6.4	6.8	6.8	80		10		43.88
390.751.14.1	150 / 100	160	110	19.8	5.5	8.8	6.2	40		5	1	45.33
390.752.14.1	150 / 125	160	125	21.3	6.4	8.7	6.9	40		5	1	59.97
390.753.14.1	150 / 150	160	160	24.8	8.2	8.6	8.6	40		5	1	68.34

Available as of April 2018

New

## Geberit Silent-PP double branch fitting 87.5°, swept-entry



### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

### Characteristics

- Acoustically optimised
- Swept entry
- Seal made of EPDM

### Technical data



Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	H [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.466.14.1	90 / 90 / 90	90	90	90	17.7	6.7	7	7	4.9	80	10	1	52.04
390.567.14.1	100 / 100 / 70	110	110	75	21.2	8.2	8.3	7.7	6.1	80	10	1	55.21
390.566.14.1	100 / 100 / 100	110	110	110	21.2	8.2	7.7	7.7	6.1	80	10	1	55.21

Available as of April 2018

New

## Geberit Silent-PP double branch fitting 87.5°



### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

### Characteristics

- Acoustically optimised
- Seal made of EPDM

### Technical data



Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.665.14.1	125 / 100 / 100	125	110	21.3	6.6	7.8	7.3	24	3	1	39.44

Available as of April 2018

New

## Geberit Silent-PP corner branch fitting 87.5°



### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

### Characteristics

- Acoustically optimised
- Seal made of EPDM

### Technical data


Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.459.14.1	90 / 90 / 90	90	90	90	15.7	4.6	5	5	80	10	1	49.82
390.559.14.1	100 / 100 / 100	110	110	110	18.6	5.6	6	6.1	80	10	1	57.30
390.662.14.1	125 / 100 / 100	125	110	110	21.3	6.6	7.8	7.3	24	3	1	62.08

Available as of April 2018

**New**

### Geberit Silent-PP combined branch fitting 87.5°, swept-entry



#### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings
- For connecting low-lying drains on shower elements

#### Characteristics

- Acoustically optimised
- Swept entry
- Seal made of EPDM

#### Technical data


Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	Z4 [cm]	Z5 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.456.14.1	90 / 90 / 50	90	90	50	30.6	2.8	10.7	4.9	4.9	7	60	5	1	53.97
390.556.14.1	100 / 90 / 50	110	90	50	32.4	2.8	10.9	5	6	8.1	60	5	1	58.36
390.558.14.1	100 / 100 / 50	110	110	50	35	2.8	12.4	6.1	6	7.7	60	5	1	58.36

Available as of April 2018

**New**

### Geberit Silent-PP combined corner branch fitting 87.5°, swept-entry, left

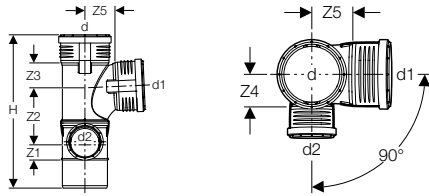

#### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings
- For connecting low-lying drains on shower elements

#### Characteristics

- Acoustically optimised
- Swept entry
- Seal made of EPDM

#### Technical data


Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	Z4 [cm]	Z5 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.470.14.1	90 / 90 / 50	90	90	50	30.6	3.2	10.9	5.2	4.9	6.7	60	5	1	53.97
390.570.14.1	100 / 90 / 50	110	90	50	32.4	3.3	11.1	5.4	5.9	7.8	60	5	1	58.36
390.578.14.1	100 / 100 / 50	110	110	50	35	3.3	12.6	6.5	5.9	7.4	60	5	1	58.36
390.561.14.1	100 / 100 / 70	110	110	75	37.5	4.2	13.8	6.5	6	7.8	60	5	1	58.36

Available as of April 2018

New

## Geberit Silent-PP combined corner branch fitting 87.5°, swept-entry, right

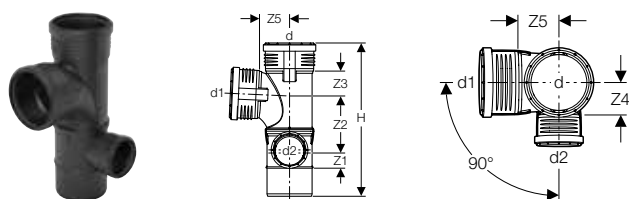

### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings
- For connecting low-lying drains on shower elements

### Characteristics

- Acoustically optimised
- Swept entry
- Seal made of EPDM

### Technical data


Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	Z4 [cm]	Z5 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.462.14.1	90 / 90 / 50	90	90	50	30.6	3.2	10.9	5.2	4.9	6.7	60	5	1	53.97
390.562.14.1	100 / 90 / 50	110	90	50	32.4	3.3	11.1	5.4	5.9	7.8	60	5	1	58.36
390.565.14.1	100 / 100 / 50	110	110	50	35	3.3	12.6	6.5	5.9	7.4	60	5	1	58.36
390.560.14.1	100 / 100 / 70	110	110	75	37.5	4.2	13.8	6.5	6	7.8	60	5	1	58.36

Available as of April 2018

New

## Geberit Silent-PP duct branch fitting 87.5°, swept-entry, left

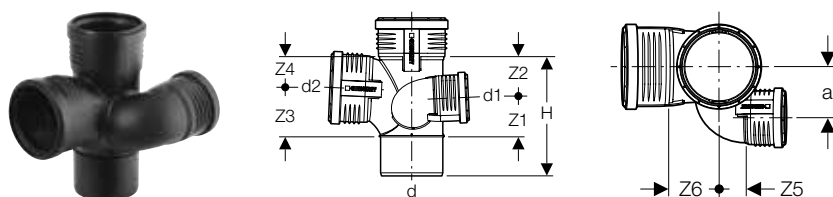

### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

### Characteristics

- Acoustically optimised
- Swept entry
- Seal made of EPDM

### Technical data



Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	a [cm]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	Z4 [cm]	Z5 [cm]	Z6 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.464.14.1	90 / 70 / 90	90	75	90	8.2	17.6	6.3	5.3	6.7	4.9	3.5	6.9	40	5	1	73.81
390.564.14.1	100 / 70 / 100	110	75	110	9.2	21.1	6.7	7.6	8.2	6.1	4.4	7.7	40	5	1	85.49

Available as of April 2018

New

## Geberit Silent-PP duct branch fitting 87.5°, swept-entry, right



### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

### Characteristics

- Acoustically optimised
- Swept entry
- Seal made of EPDM

### Technical data


Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	a [cm]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	Z4 [cm]	Z5 [cm]	Z6 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.463.14.1	90 / 70 / 90	90	75	90	8.2	17.6	6.3	5.3	6.7	4.9	3.5	6.9	40	5	1	73.81
390.563.14.1	100 / 70 / 100	110	75	110	9.2	21.1	6.7	7.6	8.2	6.1	4.4	7.7	40	5	1	85.49

Available as of April 2018

New

## Geberit Silent-PP parallel branch fitting 45°



### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

### Characteristics

- Acoustically optimised
- Seal made of EPDM

### Technical data

Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)


Art. no.	DN	d, ø [mm]	d1, ø [mm]	a [cm]	H [cm]	H1 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.457.14.1	90 / 90	90	90	11	19.6	21.4	11.3	2.2	15	2.5	80	10	1	47.97
390.557.14.1	100 / 100	110	110	13	23.3	25.5	13.8	2.7	18.4	2.9	80	10	1	47.97

Available as of April 2018

## Reducers

New

### Geberit Silent-PP reducer, eccentric, short

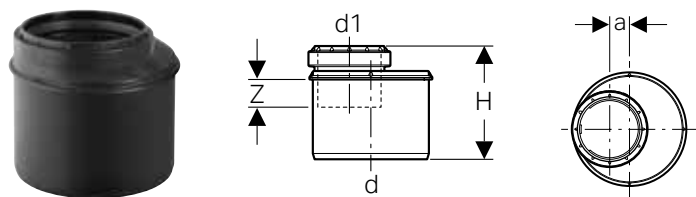

#### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

#### Characteristics

- Acoustically optimised
- Seal made of EPDM

#### Technical data


Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	a [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.373.14.1	70 / 50	75	50	1	8.4	2.3	600	50	10	1	4.02
390.474.14.1	90 / 50	90	50	1.7	8.8	2.4	600	50	10	1	5.44
390.475.14.1	90 / 70	90	75	0.4	8.9	2.8	600	50	10	1	5.44
390.575.14.1	100 / 50	110	50	2.6	9.5	2.4	400	50	10	1	5.57
390.576.14.1	100 / 70	110	75	1.4	9.6	2.9	400	50	10	1	5.86
390.577.14.1	100 / 90	110	90	0.6	9.8	3.2	400	50	10	1	6.37

Available as of April 2018

New

### Geberit Silent-PP reducer, eccentric

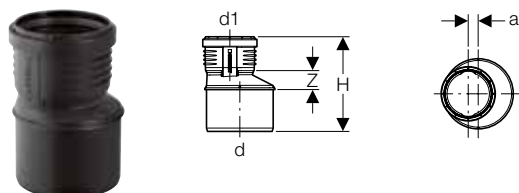

#### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

#### Characteristics

- Acoustically optimised
- Seal made of EPDM

#### Technical data


Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	a [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.271.14.1	50 / 40	50	40	0.5	11.4	1.6	800	100	10		3.06
390.279.14.1	50 / 30	50	32	0.9	11.3	1.9	800	100	10		3.20
390.372.14.1	70 / 50	75	50	1.2	13.3	2.6	800	50	10		4.02
390.471.14.1	90 / 40	90	40	2.4	14.6	3.8	600	50	10		5.44
390.472.14.1	90 / 50	90	50	1.9	14.6	3.4	400	50	10		5.44
390.473.14.1	90 / 70	90	75	0.7	13.9	2.2	400	50	10		5.44
390.571.14.1	100 / 40	110	40	3.3	16.4	4.9	400	50	10		5.86
390.572.14.1	100 / 50	110	50	2.8	16.4	4.5	320	40	10		5.57
390.573.14.1	100 / 70	110	75	1.7	15.7	3.3	400	50	10		5.86
390.574.14.1	100 / 90	110	90	1	15.7	2.7	200	50	10		6.37
390.675.14.1	125 / 100	125	110	0.7	17.1	2.9	120		10		10.70
390.775.14.1	150 / 100	160	110	2.3	19.4	4.5	80		5	1	16.01
390.776.14.1	150 / 125	160	125	1.7	19.4	4	80		5	1	16.01

Available as of April 2018

New

## Geberit Silent-PP reducer, concentric, short



### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

### Characteristics

- Acoustically optimised
- Seal made of EPDM

Art. no.	DN	d, $\varnothing$ [mm]	d1, $\varnothing$ [mm]	H [cm]	E [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.179.14.1	40 / 30	40	32	6.8	5	2000	50	10	3.20
390.278.14.1	50 / 40	50	40	6.8	5.2	2400	100	10	3.06


Available as of April 2018

### Technical data

Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

New

## Geberit Silent-PP reducing bend 87.5°



### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

### Characteristics

- Acoustically optimised
- Seal made of EPDM

Art. no.	DN	d, $\varnothing$ [mm]	d1, $\varnothing$ [mm]	H [cm]	Z [cm]	Z1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.225.14.1	40 / 50	40	50	8.1	3.1	3.5	800	50	10	2.67

Available as of April 2018

### Technical data


Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)



## Access pipes

New

### Geberit Silent-PP access pipe 90° with round service opening



#### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

#### Characteristics

- Acoustically optimised
- Service opening with simplified cover guide
- Flow optimised cap
- Cap flush with pipe

- With seal made of EPDM
- Seal made of EPDM

#### Technical data

Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

#### Scope of delivery


- Cover made of PP

Art. no.	DN	d, ø [mm]	H [cm]	L [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.227.14.1	50	50	12.3	4.7	400	50	10		9.77
390.327.14.1	70	75	15.4	6.1	240	30	5		12.18
390.427.14.1	90	90	17.7	7.4	80		10		16.56
390.527.14.1	100	110	21	9	80		10		17.99
390.627.14.1	125	125	21.5	9.8	80		10		35.85
390.727.14.1	150	160	22.2	11.6	40		5	1	54.97

Available as of April 2018

New

### Geberit Silent-PP access pipe 90° with oval service opening



#### Application purposes

- For horizontal installation
- For vertical installation

#### Characteristics

- Oval opening
- Seal made of EPDM

#### Scope of delivery

- Seal made of EPDM
- Cover, grey cast iron, dip-coated black
- Double ring seal socket made of PP, with lip seals

Art. no.	DN	d, ø [mm]	A [cm]	H [cm]	h [cm]	X [cm]	SU1 [pc.]	GBP/pc.
390.503.14.1	100	110	12	40.3	28	20	1	175.86
390.603.14.1	125	125	12.5	41.4	28	20.5	1	219.84
390.703.14.1	150	160	14	43.4	28	21.5	1	249.14


Available as of April 2018

## Connections

### Push-in connections

**New**

#### Geberit Silent-PP expansion socket

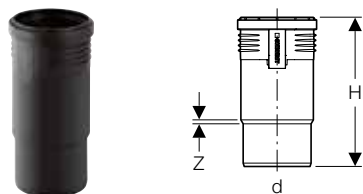

##### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings
- For repairing damaged Geberit Silent-PP pipes

##### Characteristics

- Acoustically optimised
- With expansion compensation
- Seal made of EPDM

##### Technical data


Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.118.14.1	40	40	16.8	0.1	800	50	10	3.22
390.218.14.1	50	50	18.1	0.3	800	50	10	4.25
390.318.14.1	70	75	19.8	0.6	240	30	5	6.02
390.418.14.1	90	90	21.7	0.3	240	30	5	9.01
390.518.14.1	100	110	24.2	0.5	120	30	5	9.77
390.618.14.1	125	125	26.5	0.6	120		10	13.13
390.718.14.1	150	160	29	0.6	40		5	24.46

Available as of April 2018

**New**

#### Geberit Silent-PP double ring seal socket



##### Application purposes

- For draining off waste water within buildings
- For buried discharge pipes within building structures

##### Characteristics

- Acoustically optimised
- Seal made of EPDM

##### Technical data


Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, ø [mm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.016.14.1	30	32	9	0.1	2000	50	10		2.91
390.116.14.1	40	40	9.6	0.1	1200	50	10		2.96
390.216.14.1	50	50	10.3	0.1	800	50	10	1	3.06
390.316.14.1	70	75	11.3	0.2	400	50	10		4.15
390.416.14.1	90	90	12.4	0.2	240	30	10		6.60
390.516.14.1	100	110	13.9	0.3	240	30	5		7.11
390.616.14.1	125	125	15.2	0.4	120		10		13.34
390.716.14.1	150	160	16.5	0.4	60		5		20.00

Available as of April 2018

New

## Geberit Silent-PP slip coupling



### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings
- For repairing damaged Geberit Silent-PP pipes

### Characteristics

- Acoustically optimised
- Seal made of EPDM

Art. no.	DN	d, ø [mm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.017.14.1	30	32	9	2000	50	10	2.91
390.117.14.1	40	40	9.6	1200	50	10	2.96
390.217.14.1	50	50	10.3	800	50	10	3.06
390.317.14.1	70	75	11.3	400	50	10	4.15
390.417.14.1	90	90	12.4	400	50	10	6.60
390.517.14.1	100	110	13.9	240	30	5	7.11
390.617.14.1	125	125	15.2	120	10	10	13.34
390.717.14.1	150	160	16.5	60	5	5	20.00

Available as of April 2018


### Technical data

Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

## Claw connections

New

## Geberit retaining claw



### Application purposes

- For Geberit Silent-PP
- For rainwater pipes
- For creating lengthways non-positive push-in connections
- For building drainage

### Characteristics

- Can be retrofitted
- Removable

### Technical data

Maximum internal pressure	2 bar
Material	CrNi steel 1.4301 (EN 10088)


Art. no.	DN	d, ø [mm]	AD [cm]	D [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.008.14.1	30	32	5.7	4.5	3.3	10	1	4.20
390.108.14.1	40	40	6.9	5.7	3.5	10	1	5.07
390.203.14.1	50	50	8.2	7	3.8	10	1	5.86
390.308.14.1	70	75	10.9	9.6	3.7	10	1	7.00
390.408.14.1	90	90	12.6	11.3	4.1	10	1	7.85
390.508.14.1	100	110	14.7	13.5	4.1	10	1	12.60
390.608.14.1	125	125	16.5	15.2	4.5	10	1	16.54
390.708.14.1	150	160	20.6	19.3	5	4	1	22.14

Available as of April 2018

## Adaptors on other product materials

**New**

### Geberit Silent-PP adaptor sleeve to cast iron



#### Application purposes

- For draining off waste water within buildings

#### Characteristics

- Acoustically optimised


Art. no.	DN	d, $\emptyset$ [mm]	AB [mm]	H [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.295.14.1	40 / 50	40–56	58	6.3		50	1	4.12
390.395.14.1	56 / 70	56–75	78	7.7		50	1	5.39
390.495.14.1	70 / 90	75–90	83	7.7		20	1	6.13
390.595.14.1	100 / 100	104–110	110	9.5		20	1	10.94
390.695.14.1	125	125	130	10.3	360	10		16.38

Available as of April 2018

#### Technical data

Material	EPDM
----------	------

### Geberit adaptor sleeve to cast iron



#### Application purposes


- For floor-standing WCs

Art. no.	DN	d, $\emptyset$ [mm]	d1, $\emptyset$ [mm]	SU1 [pc.]	GBP/pc.
367.009.16.1	90 / 100	90	110	1	22.43

#### Technical data

Material	EPDM
----------	------

### Geberit Silent-PP adaptor socket to Geberit Silent-db20



#### Application purposes

- For draining off waste water within buildings
- For transitions from Geberit Silent-PP to Geberit Silent-db20
- For transitions from Geberit Silent-db20 to Geberit Silent-PP

#### Characteristics

- Acoustically optimised
- With lip seal made of EPDM
- Claw ring made of chrome nickel steel

#### Technical data

Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, $\emptyset$ [mm]	d1, $\emptyset$ [mm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.296.14.1	50 / 56	50	56	8.7	0.3	640	40	10		5.94
390.396.14.1	70 / 70	75	75	9.2	0.3	400	50	10		8.77
390.496.14.1	90 / 90	90	90	9.7	0.3	400	50	10		9.70
390.596.14.1	100 / 100	110	110	10.4	0.3	240	30	5		9.99
390.796.14.1	150 / 150	160	160	13.6	0.4	80		5	1	61.53




- Also for transitions from Geberit Silent-PP to Geberit HDPE

## Waste fittings

### Connection bends

New

#### Geberit Silent-PP connection bend 90°



##### Application purposes

- For draining off waste water within buildings

##### Characteristics

- Acoustically optimised

##### Technical data

Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

##### Scope of delivery


- Protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	H1 [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.083.14.1	30	32	46	7.1	5.1	2.6	1200	50	10	5.31
390.183.14.1	40	40	46	7.4	5.5	2.6	1200	50	10	3.49
390.283.14.1	50	50	46	8.2	5.7	3.2	800	100	10	3.49
390.284.14.1	50	50	58	8.3	5.9	3.2	800	100	10	3.49

Available as of April 2018

New

#### Geberit Silent-PP connection bend 90°, long



##### Application purposes

- For draining off waste water within buildings

##### Characteristics

- Acoustically optimised

##### Technical data

Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

##### Scope of delivery


- Protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	H1 [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.186.14.1	40	40	46	16	5.5	11.3	800	100	10	3.78

Available as of April 2018

**New**

## Geberit Silent-PP connection bend 90°, extended



### Application purposes

- For draining off waste water within buildings

### Characteristics

- Acoustically optimised

### Technical data

Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

### Scope of delivery


- Protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	H1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
390.286.14.1	50	50	46	16	20	10.9	160	20	3.78
390.287.14.1	50	50	58	16	20	10.9		20	3.78

Available as of April 2018

**New**

## Geberit Silent-PP double connection bend 90°, extended

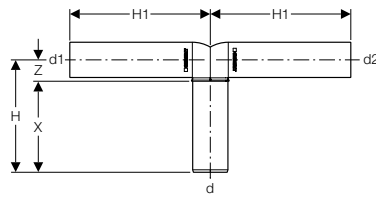

### Application purposes

- For draining off waste water within buildings

### Characteristics

- Acoustically optimised

### Technical data

Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

### Scope of delivery


- 2 protective caps

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	H [cm]	H1 [cm]	X [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.289.14.1	50 / 40 / 40	50	46	46	16	20	10.9	5.1	160	20	5	5.52

Available as of April 2018

New

## Geberit Silent-PP connection bend 87.5° for WC

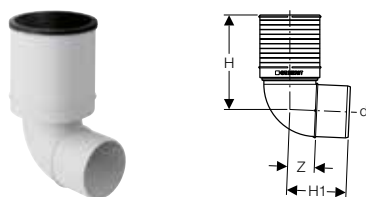

### Application purposes

- For draining off waste water within buildings
- For connecting floor-standing WC ceramic appliances

### Characteristics

- Acoustically optimised

### Technical data

Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

### Scope of delivery

- Protective cap
- Sleeve made of EPDM

Art. no.	Surface / colour	DN	d, ø [mm]	H [cm]	H1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.493.11.1	white alpine	90	90	20	12.6	5.8	120	10	1	22.03
390.593.11.1	white alpine	100	110	19.1	11	4.9	80	10	1	23.96

Available as of April 2018

## Straight connectors

New

## Geberit Silent-PP straight connector



### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

### Characteristics

- Acoustically optimised

### Technical data

Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

### Scope of delivery

- Protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	E [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.080.14.1	30	32	46	3.5	4.5	1200	50	10	5.31
390.180.14.1	40	40	46	3.2	4.7	1920	80	10	3.49
390.281.14.1	50	50	58	3.2	5.1	1200	100	10	3.49


Available as of April 2018

### To order additionally

- Sleeve

New

## Geberit Silent-PP straight connector for WC



### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings
- For connecting floor-standing WC ceramic appliances

### Characteristics

- Acoustically optimised

### Technical data

Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

### Scope of delivery

- Protective cap
- Sleeve made of EPDM


Art. no.	Surface / colour	DN	d, ø [mm]	H [cm]	E [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.592.11.1	white alpine	100	110	10.9	18	80	10	1	22.48

Available as of April 2018

## Accessories

### Air admittance valves

#### Geberit air admittance valve GRB50 for Geberit drainage systems



### Application purposes

- For ventilating discharge pipes
- For building drainage
- For gravity drainage systems
- For discharge pipes with pipe dimensions ø 32 mm, ø 40 mm and ø 50 mm

### Characteristics

- Antivacuum valve in accordance with EN 12380, Type A I

### Technical data

Operating temperature	-20 - +60 °C
Air-flow rate (atmospheric air) at -250 Pa	7.5 l/s


### Scope of delivery

- Thermal insulation cap
- Sleeve
- Adaptor

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	d2, ø [mm]	B [cm]	H [cm]	h [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
303.900.00.1	50	50	1 1/2	32	40	7	7.3	3.5	8	50	10	1	35.32



## Geberit air admittance valve GRB90 for Geberit Silent-PP and Geberit Silent-Pro



### Application purposes

- For ventilating discharge pipes
- For building drainage
- For gravity drainage systems
- For pipes and fittings  $\varnothing$  75–110 mm

### Technical data

Operating temperature	-20 - +60 °C
Air-flow rate (atmospheric air) at -250 Pa	32 l/s

### Scope of delivery

- Sleeve

### Characteristics


- Thermal insulation integrated in housing
- Antivacuum valve in accordance with EN 12380, Type A I

Art. no.	d, $\varnothing$ [mm]	d1, $\varnothing$ [mm]	di, $\varnothing$ [mm]	B [cm]	H [cm]	h [cm]	L [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
307.006.00.1	90	106	75	12	14.1	5	19.5	140	4	1	25.61

## Pipe brackets

New

## Geberit Silent-PP adaptor nipple M10 to G 1/2"




Art. no.	Surface / colour	G ["]	M [mm]	L [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.798.26.1	galvanized	1/2	10	5.2	100	20	7.00

Available as of April 2018

**New**

## Geberit pipe bracket, insulated, with threaded socket M8 / M10

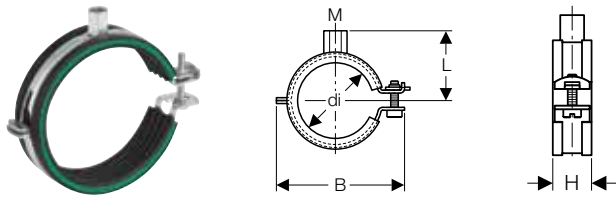

### Characteristics

- Quick-lock
- Screw with slotted head and crosshead
- Threaded socket four-times welded

- Sound insulation in accordance with DIN 4109
- Zinc-plated

### Technical data

Material	Steel
----------	-------

Art. no.	Surface / colour	DN	M [mm]	di, $\varnothing$ [mm]	B [cm]	H [cm]	L [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.099.26.1	galvanized	30	8 / 10	32	7.1	2.3	4	100	25	1.80
390.199.26.1	galvanized	40	8 / 10	40	7.7	2.3	4.2	100	25	1.88
390.299.26.1	galvanized	50	8 / 10	50	8.8	2.3	4.8	100	25	1.80
390.399.26.1	galvanized	70	8 / 10	75	12.6	2.8	6.2	100	25	3.51
390.499.26.1	galvanized	90	8 / 10	90	13.7	2.8	6.8	100	25	3.57
390.599.26.1	galvanized	100	8 / 10	110	15.6	2.8	7.7	100	25	3.67
390.699.26.1	galvanized	125	8 / 10	125	17.4	2.8	8.9	50	10	5.94
390.799.26.1	galvanized	150	8 / 10	160	21.2	2.8	10.6	50	10	7.29

Available as of April 2018

## Sealings

**New**

## Geberit Silent-PP socket plug



### Application purposes

- For buried discharge pipes within building structures
- For draining off waste water within buildings

### Characteristics

- Acoustically optimised

### Technical data

Installation temperature	-10 - +40 °C
Material	PP-MD
Thermal expansion	0.08 mm/(m · K)

Art. no.	DN	d, $\varnothing$ [mm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.128.14.1	40	40	4.1	2000	50	10	2.32
390.228.14.1	50	50	4.7	2000	50	10	3.06
390.328.14.1	70	75	5.4	800	50	10	4.02
390.428.14.1	90	90	6	400	50	10	8.51
390.528.14.1	100	110	6.6	400	50	10	9.01
390.628.14.1	125	125	7.3	400	10	10	12.07
390.728.14.1	150	160	7.9	120	5	5	14.95

Available as of April 2018

## Seals

### Geberit Silent-PP lip seal



#### Application purposes

- For Geberit Silent-PP ring seal sockets
- For Geberit Silent-Pro ring seal sockets

#### Technical data

Material	EPDM
----------	------

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
242.278.00.1	30	32	100	10	1.19
241.785.00.1	40	40	100	10	1.19
241.786.00.1	50	50	100	10	1.19
241.787.00.1	70	75	100	10	1.93
241.790.00.1	90	90	100	10	1.93
241.791.00.1	100	110	100	10	1.93
242.279.00.1	125	125	100	10	1.19
242.280.00.1	150	160	100	10	1.19

**New**

### Geberit Silent-PP lip seal, symmetric



#### Application purposes

- For Geberit Silent-PP expansion sockets and slip coupling
- For Geberit Silent-Pro slip couplings

#### Technical data

Material	EPDM
----------	------

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
242.281.00.1	30	32		10	1.19
241.792.00.1	40	40		10	1.19
241.793.00.1	50	50		10	1.19
241.794.00.1	70	75		10	1.19
241.795.00.1	90	90		10	1.19
241.796.00.1	100	110	100	10	1.19
242.282.00.1	125	125		10	1.19
242.283.00.1	150	160		10	1.19

Available as of April 2018

**New**

### Geberit Silent-PP sleeve



#### Application purposes

- For Geberit Silent-PP connection bends and straight connectors

#### Technical data

Material	EPDM
----------	------

Art. no.	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
241.797.00.1	110	20	5	8.61

Available as of April 2018

## Protection covers

**New**

### Geberit Silent-PP protective cap



#### Application purposes

- For Geberit Silent-PP connection bends and straight connectors

#### Technical data

Material	PE-LD
----------	-------

#### Characteristics

- Yellow

Art. no.	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
241.799.00.1	46	30	5	1.93
241.885.00.1	58	20	5	3.99
241.798.00.1	110	20	5	3.99

Available as of April 2018

## Consumables

### Geberit lubricant, 250 ml



#### Application purposes

- For lubricating the seals of push-fit connections
- For building drainage

Art. no.	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
953.761.00.1	780	10	1	4.03

### Geberit grease pencil



#### Application purposes

- For building drainage

#### Characteristics

- Wax paint marker with paper jacket

Art. no.	SU2 [pc.]	GBP/pc.
958.782.00.1	12	3.47

# Appendix

## Abbreviation

Abbreviation	Designation
I1	length, partial dimension (cm)
L2	length (cm)
I2	length, partial dimension (cm)
L3	length (cm)
I3	length, partial dimension (cm)
La	linear expansion (cm)
IK	grip length, screw (cm)
M	metric thread (mm)
m	bolt hole diameter (cm)
n	number of bolts, flange connection (PC)
PN	nominal pressure (bar)
R	taper external thread (")
r	radius (cm)
DN	nominal width
R1	taper external thread (")
Rg	round thread (")
Rp	taper internal pipe thread (")
Rp1	taper internal pipe thread (")
Rp2	taper internal pipe thread (")
S	pipe series
s	wall thickness (mm)
s1	wall thickness (mm)
SW	spanner width (mm)
A	projection (cm)
s ISO	wall thickness (for labels) (mm)
a	partial dimension (cm)
A1	projection (cm)
V	measuring range, volumetric flow rate (l/min)
a1	partial dimension (cm)
AB	connection area (mm)
AB1	connection area (mm)
AB2	connection area (mm)
Acm <sup>2</sup>	clear cross-sectional area (cm <sup>2</sup> )
AD	connecting distance (cm)
arc	angle (°)
AD1	connecting distance (cm)
B	width (cm)
b	partial dimension (cm)
B1	width (cm)
c	flange hole diameter (mm)
d, ø	outer diameter (mm)
UNC	inch thread
D	outer diameter (cm)
d1, ø	outer diameter (mm)
D1	outer diameter (cm)
d2, ø	outer diameter (mm)
d3, ø	outer diameter (mm)
da	outer pipe diameter (mm)

Abbreviation	Designation
di, ø	inner diameter (mm)
DN/OD	nominal width
DN	nominal width
E	insertion depth (cm)
E1	insertion depth (cm)
G	pipe thread (")
G1	pipe thread (")
X	leg length / L-dimension (cm)
X1	leg length / L-dimension (cm)
G2	pipe thread (")
X2	leg length / L-dimension (cm)
H	height (cm)
X3	leg length / L-dimension (cm)
h	height, partial dimension (cm)
H1	height (cm)
X4	leg length / L-dimension (cm)
h1	height, partial dimension (cm)
X5	leg length / L-dimension (cm)
h2	height, partial dimension (cm)
h3	height, partial dimension (cm)
k	flange, diameter of bolt circle (cm)
X6	leg length / L-dimension (cm)
Z	Z-dimension (cm)
Z1	Z-dimension (cm)
Z2	Z-dimension (cm)
Z3	Z-dimension (cm)
Z4	Z-dimension (cm)
K	maximum cutting (cm)
Z5	Z-dimension (cm)
K1	maximum cutting (cm)
Z6	Z-dimension (cm)
K2	maximum cutting (cm)
K3	maximum cutting (cm)
KL	cable length (cm)
L	length (cm)
I	length, partial dimension (cm)
L	L / length (m)
L1	length (cm)

## Sales and delivery conditions

valid from 1st of April 2018

### GENERAL

1. In these Conditions of Sale "The Company" means Geberit Sales Ltd. "The Customer" means the person, firm or company with whom The Company contracts. "The Contract" Any contract between The Company and the Customer for the sale and purchase of the Goods incorporating the Conditions (including any part or parts of them). "The Goods" Any Goods agreed in the Contract to be supplied to the Customer by The Company (including any part or parts of them).
2. These Conditions of Sale apply to and govern any contract between The Company and the Customer to the exclusion of any other conditions contained on, or in, any letter, order form, receipt of similar document emanating from the Customer. No variation of these Conditions of Sale shall be effective unless expressly agreed by The Company in writing.
3. All quotations are for information only and are not to be considered as an offer by The Company. No Contract shall come into existence until an order by the Customer has been accepted by The Company.
- 3.1 Acceptance by The Company of any order shall be on the basis that Goods will be invoiced at the prices contained in The Company's price list current at the date of despatch unless otherwise agreed in writing by The Company.
4. Except where otherwise stated in the contract or in The Company's current price list all prices include the cost of packaging and delivery (but not installation). The Company reserves the right to make additional charges if the Customer requires a method of packaging or delivery different from that normally employed by The Company.
- 4.1 The Customer shall, in addition to the net purchase price, pay to The Company the amount of any Value Added Tax or other sales tax at the rate in force at the time the Goods are invoiced.

### GENERAL

5. All Goods will be invoiced at the time of, or soon after, despatch. Payment for the Goods must be received by The Company not later than the last day of the month following the date of the invoice. In the event of late payment The Company reserves the right to charge interest at a rate of 2% per month.
- 5.1 In the event of the Customer postponing delivery, or requesting that The Company suspend the manufacture of the Goods, or failing to give The Company sufficient information to enable it to process any order, the Customer shall pay any additional costs and expenses thereby incurred by The Company.
- 5.2 Unless otherwise agreed in writing by The Company the Customer shall not be entitled to set off against any moneys due to The Company under the Contract any sums claimed by or due to the Customer from The Company under the Contract or any other Contract between The Company and the Customer.

### ILLUSTRATION AND DIMENSIONS

6. All information and illustrations contained in brochures, catalogues, price lists, trade literature and advertising material produced by The Company are approximate only, intended to indicate only the general character of the Goods, and do not form any part of any contract between The Company and the Customer.

- 6.1 The dimensions of the Goods are subject to manufacturing tolerances customary within the trade. Dimensions contained in quotations, acknowledgements of orders, or catalogues, price lists, advertising matter and other trade literature are therefore approximate only.

### SUBSTITUTED GOODS

7. The Company reserves the right to substitute Goods which are similar to the Goods ordered by the Customer provided that such substituted Goods are no less suitable for the purpose for which they are generally used than Goods ordered by the Customer.

### DELIVERY

8. The Company cannot offer a timed delivery service, although we will try to meet the customer needs wherever possible. Any deliveries required outside our delivery schedule will be at the customer's expense.
9. Delivery shall be made to the Customer's premises only.
10. The Customer shall be responsible for unloading the Goods at the point of delivery.
11. The Customer will confirm the goods are received at the time of delivery by signing the Proof Of Delivery document (POD) providing a signature, date and printed name.
12. Immediately on collection or delivery, whichever is appropriate, the Customer shall examine the goods. Any shortages, damages or other delivery discrepancies must be notified directly to the Customer Support team of The Company in writing within three working days of delivery or collection. Credits will not be given if a POD has been signed and there have been no reported anomalies within 3 working days of the delivery date.
13. The Company will use its best endeavours to comply with any delivery date, however, collection or delivery dates and times indicated by the Company shall be regarded as best estimates only. The Company cannot be responsible for any loss or damage whatsoever caused by late delivery where circumstance beyond The Company's control have caused such delay.
14. The Company operates a minimum delivery value requirement for deliveries to the Customer's premises. This currently stands at £500.
15. Orders placed below the minimum order value will be subject to a £10 minimum order value charge.
16. Express orders should be placed before our cut offs for delivery the next day. These orders are subject to a carriage charge to the customer and will be priced based on weight.

### RETURNS

17. The Company does not operate a returns policy for saleable stock or for stock that is defective or damaged upon receipt. Any agreed stock return is at the discretion of The Company and only with prior written consent. Where such consent is given, a handling charge of a minimum of 30% of invoiced value will be made.

## RISK AND RETENTION OF OWNERSHIP

18. The risk in the Goods contracted to be sold by The Company shall pass to the Customer when the Goods are delivered to or collected by the Customer.
19. Notwithstanding any passing of risk to the Customer, The Company retains ownership of the Goods the subject matter of this Contract the property in which shall not pass to the Customer and the Customer shall keep any Goods delivered to it as bailee for and on behalf of The Company until The Company has received full payment of the price of all Goods (whether or not the Goods are delivered in instalments and some have been paid for by the Customer).
- 19.1 Until ownership of the Goods has passed to the Customer the Customer;
- (i) shall insure the Goods against any loss or damage with an insurance office of repute.
  - (ii) shall store the Goods separately or in some other way ensure that they are readily identifiable as the property of The Company.
  - (iii) irrevocably authorise the representative of The Company at any time and from time to time (whether or not payment is due) to repossess the Goods and for such purpose to enter any premises occupied by the Customer or where the Goods are or are thought to be and to sever the Goods from anything to which they are attached without being responsible for any damage caused.
  - (iv) shall keep the Goods free from any charge, lien or other encumbrance
- 19.2 If, while under The Company's ownership, the Goods or any of them are processed or incorporated into other Goods ("the New Goods") then, provided the Goods remain a readily identifiable and removable part of the New Goods, the provisions of conditions (a) and (b) shall apply.
- 19.3 The Company (acting on its own account, not as agent for the Customer) may sell or agree to sell any of the Goods or the New Goods in The Company's possession on such terms as it may in its sole discretion consider appropriate.
- 19.4 The Company shall be entitled to a general lien over all Goods and materials of the Customer which is in The Company's possession or control from time to time for any sums due at any time whatsoever to The Company.
- 19.5 Nothing in this condition shall confer any right upon the Customer to refuse or delay payment therefore.

## LIMITATION OF LIABILITIES

20. Goods may be delivered in cartons, bundles, returnable containers, loose or in other packaging. In any case where it is established to the satisfaction of The Company that the Goods have been damaged or lost (whether wholly or in part) in transit The Company will, at its own cost, repair or replace same provided that
- (i) in the case of partial loss or damage, the Customer has returned to The Company's representative (or where the Goods have been delivered by a Carrier his representative) The Company' receipt note duly signed by the Customer's representative and indicating thereon as shortage of or damage to cartons, bundles, returnable containers, loose Goods or other such packages as shall make up the delivery and full particulars are notified directly to The Company in writing within three working days of delivery;
  - (ii) in the case of damage the Goods and their packaging are retained by the Customer for inspection by The Company's representative. The Company will not be liable for any loss or damage in transit, except as above.
- 20.1 Where it is established to the satisfaction of The Company that Goods delivered by them or collected by the Customer, contain at the time of receipt by the Customer some defect in quality (not being a defect caused by some act or neglect of the Customer or a third party) and the Goods are returned to The Company at the Customer's expense within three months of despatch to the Customer, The Company will at its own cost repair or replace them (the choice being at The Company's option).

- 20.2 (c) Save as aforesaid and to the extent permitted by law The Company will not be liable to the Customer for any loss or damage whatsoever suffered as a result of a defect in quality or defective installation or the fact that the Goods are not fit for a particular purpose save for the conditions implied by section 12 of the Sale of Goods Act 1979 and without prejudice to the generality of the foregoing any implied term, condition or warranty statutory or otherwise as to the quality of the Goods sold or their fitness for any particular purpose or as to their correspondence with any description or sample
21. is hereby excluded.
22. No warranty or representation given by or on behalf of The Company including without prejudice to the generality of the foregoing any advice as to the installation quantities use or performance of Goods supplied by The Company shall be binding upon The Company unless specifically stated in writing by The Company to be incorporated in the contract. Nothing in these Conditions excludes or limits the liability of The Company for death or personal injury caused by The Company's negligence or fraudulent misrepresentation.

## CONSEQUENTIAL LOSS

23. Without prejudice to the generality of the foregoing provisions The Company shall not in any event be liable to the Customer for any indirect or consequential loss of or damage (whether for loss of profit, loss of business, depletion of goodwill or otherwise) costs, expenses or other claims for consequential compensation whatsoever (howsoever caused) which arise out of or in connection with the Contract.

## INSOLVENCY AND BREACH OF CONTRACT

24. The Company shall have the option (without prejudice to any of its other rights against the Customer) by notice in writing to the Customer to rescind the contract or to suspend delivery in the following events:
- (i) should any sum owing by the Customer to The Company be overdue.
  - (ii) should the Customer be in breach of any term of the contract with The Company.
  - (iii) should the Customer enter into any composition or arrangement with, or for the benefit of its creditors or have a receiving order in bankruptcy made against him or (if a body corporate) should it go into liquidation either voluntary or compulsory or under supervision or have a receiver and/or manager administrative receiver or administrator appointed over all or any part of its assets, or in Scotland should the Customer become notour bankrupt, or sequestrated, or a receiver, or judicial factor, or trustee is appointed, for any portion of the Customer's estate or effects or suffer any arrestment charge pending or other diligence to be issued or levied upon the Customer his estate or effects.

## HEALTH AND SAFETY

25. As The Company is under a duty pursuant to S 6 of the Health and Safety at Work Act 1974 in respect of the design, manufacture and supply of any article for use at work, the Customer shall be deemed to have been afforded by The Company reasonable opportunity for the testing and examination of Goods or materials in respect of their safety and risk to health prior to delivery to the Customer, and he shall be deemed to have been afforded by The Company adequate information about the Goods and materials in respect of the use for which they are designed, and have been tested, and of any conditions necessary to ensure that when put to that use they will be safe and without risk to health, whether or not the said information has been requested by the Customer.

## **INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS**

26. The Company is the proprietor or beneficial owner of patents, registered designs, trademarks and tradenames, copyright or other industrial or intellectual property rights relating to the Goods and The Company reserves all such rights to itself and no authorisation of licence is granted to the Customer to use the Goods or any drawing or specifications relating to the same provided to the Customer by The Company otherwise than for the purpose provided.

## **FORCE MAJEURE**

27. The Company reserves the right to defer the date of delivery or to cancel the Contract or reduce the volume of the Goods ordered by the Customer (without liability to the Customer) if it is prevented from or delayed in the carrying on of its business due to circumstances beyond the reasonable control of the Company including without limitation, acts of God, Governmental actions, war or national emergency, riot, civil commotion, fire, explosion, flood, epidemic, lock out, strikes or other labour disputes (whether or not relating to either party's workforce) or restraints or delays affecting carriers or inability or delay in obtaining supplies of adequate suitable materials.

## **WAIVER**

28. Forbearance or indulgence by The Company shown or granted to the Customer whether in respect of these Conditions of Sale or otherwise, shall not affect or prejudice the rights of The Company against the Customer or be taken as a waiver of any of these Conditions of Sale.

## **GOVERNING LAW**

29. Any contract incorporating these Conditions of Sale shall be governed by and construed in accordance with the laws of England and The Company and the Customer hereby agree to submit to the jurisdiction of the English Courts.

## **HEADNOTES**

30. The head notes to these Conditions have been inserted for convenience and shall not affect their construction.

**Conditions Of Sale**  
Geberit Sales Ltd  
Geberit House  
Edgehill Drive  
Warwick  
CV34 6NH

Effective January 2018



## Index

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
241.785.00.1	29	390.122.14.1	9	390.316.14.1	20	390.472.14.1	17
241.786.00.1	29	390.123.14.1	9	390.317.14.1	21	390.473.14.1	17
241.787.00.1	29	390.124.14.1	9	390.318.14.1	20	390.474.14.1	17
241.790.00.1	29	390.128.14.1	28	390.320.14.1	9	390.475.14.1	17
241.791.00.1	29	390.130.14.1	10	390.321.14.1	9	390.493.11.1	25
241.792.00.1	29	390.131.14.1	10	390.322.14.1	9	390.495.14.1	22
241.793.00.1	29	390.147.14.1	12	390.323.14.1	9	390.496.14.1	22
241.794.00.1	29	390.179.14.1	18	390.324.14.1	9	390.499.26.1	28
241.795.00.1	29	390.180.14.1	25	390.327.14.1	19	390.503.14.1	19
241.796.00.1	29	390.183.14.1	23	390.328.14.1	28	390.504.14.1	7
241.797.00.1	29	390.186.14.1	23	390.331.14.1	10	390.505.14.1	7
241.798.00.1	30	390.199.26.1	28	390.332.14.1	10	390.506.14.1	7
241.799.00.1	30	390.203.14.1	21	390.333.14.1	10	390.507.14.1	7
241.885.00.1	30	390.204.14.1	7	390.347.14.1	12	390.508.14.1	21
242.278.00.1	29	390.205.14.1	7	390.348.14.1	12	390.513.14.1	8
242.279.00.1	29	390.206.14.1	7	390.349.14.1	12	390.514.14.1	8
242.280.00.1	29	390.207.14.1	7	390.372.14.1	17	390.516.14.1	20
242.281.00.1	29	390.213.14.1	8	390.373.14.1	17	390.517.14.1	21
242.282.00.1	29	390.214.14.1	8	390.395.14.1	22	390.518.14.1	20
242.283.00.1	29	390.216.14.1	20	390.396.14.1	22	390.520.14.1	9
303.900.00.1	26	390.217.14.1	21	390.399.26.1	28	390.521.14.1	9
307.006.00.1	27	390.218.14.1	20	390.404.14.1	7	390.522.14.1	9
367.009.16.1	22	390.220.14.1	9	390.405.14.1	7	390.523.14.1	9
390.004.14.1	7	390.221.14.1	9	390.406.14.1	7	390.524.14.1	9
390.005.14.1	7	390.222.14.1	9	390.407.14.1	7	390.527.14.1	19
390.006.14.1	7	390.223.14.1	9	390.408.14.1	21	390.528.14.1	28
390.007.14.1	7	390.224.14.1	9	390.413.14.1	8	390.531.14.1	10
390.008.14.1	21	390.225.14.1	18	390.414.14.1	8	390.532.14.1	10
390.013.14.1	8	390.227.14.1	19	390.416.14.1	20	390.533.14.1	10
390.014.14.1	8	390.228.14.1	28	390.417.14.1	21	390.534.14.1	10
390.016.14.1	20	390.230.14.1	10	390.418.14.1	20	390.535.14.1	10
390.017.14.1	21	390.231.14.1	10	390.420.14.1	9	390.547.14.1	12
390.020.14.1	9	390.232.14.1	10	390.421.14.1	9	390.548.14.1	12
390.021.14.1	9	390.247.14.1	12	390.422.14.1	9	390.549.14.1	12
390.022.14.1	9	390.248.14.1	12	390.423.14.1	9	390.554.14.1	11
390.023.14.1	9	390.271.14.1	17	390.424.14.1	9	390.555.14.1	11
390.024.14.1	9	390.278.14.1	18	390.427.14.1	19	390.556.14.1	14
390.030.14.1	10	390.279.14.1	17	390.428.14.1	28	390.557.14.1	16
390.046.14.1	12	390.281.14.1	25	390.432.14.1	10	390.558.14.1	14
390.080.14.1	25	390.283.14.1	23	390.433.14.1	10	390.559.14.1	13
390.083.14.1	23	390.284.14.1	23	390.434.14.1	10	390.560.14.1	15
390.099.26.1	28	390.286.14.1	24	390.448.14.1	12	390.561.14.1	14
390.104.14.1	7	390.287.14.1	24	390.449.14.1	12	390.562.14.1	15
390.105.14.1	7	390.289.14.1	24	390.454.14.1	11	390.563.14.1	16
390.106.14.1	7	390.295.14.1	22	390.456.14.1	14	390.564.14.1	15
390.107.14.1	7	390.296.14.1	22	390.457.14.1	16	390.565.14.1	15
390.108.14.1	21	390.299.26.1	28	390.459.14.1	13	390.566.14.1	12
390.113.14.1	8	390.304.14.1	7	390.462.14.1	15	390.567.14.1	12
390.114.14.1	8	390.305.14.1	7	390.463.14.1	16	390.569.14.1	11
390.116.14.1	20	390.306.14.1	7	390.464.14.1	15	390.570.14.1	14
390.117.14.1	21	390.307.14.1	7	390.466.14.1	12	390.571.14.1	17
390.118.14.1	20	390.308.14.1	21	390.469.14.1	11	390.572.14.1	17
390.120.14.1	9	390.313.14.1	8	390.470.14.1	14	390.573.14.1	17
390.121.14.1	9	390.314.14.1	8	390.471.14.1	17	390.574.14.1	17

Art. no.	Page	Art. no.	Page
390.575.14.1	17	390.737.14.1	10
390.576.14.1	17	390.751.14.1	12
390.577.14.1	17	390.752.14.1	12
390.578.14.1	14	390.753.14.1	12
390.592.11.1	26	390.775.14.1	17
390.593.11.1	25	390.776.14.1	17
390.595.14.1	22	390.796.14.1	22
390.596.14.1	22	390.798.26.1	27
390.599.26.1	28	390.799.26.1	28
390.603.14.1	19	953.761.00.1	30
390.604.14.1	7	958.782.00.1	30
390.605.14.1	7		
390.606.14.1	7		
390.607.14.1	7		
390.608.14.1	21		
390.613.14.1	8		
390.614.14.1	8		
390.616.14.1	20		
390.617.14.1	21		
390.618.14.1	20		
390.620.14.1	9		
390.621.14.1	9		
390.622.14.1	9		
390.623.14.1	9		
390.624.14.1	9		
390.627.14.1	19		
390.628.14.1	28		
390.634.14.1	10		
390.635.14.1	10		
390.636.14.1	10		
390.650.14.1	12		
390.651.14.1	12		
390.652.14.1	12		
390.662.14.1	13		
390.665.14.1	13		
390.675.14.1	17		
390.695.14.1	22		
390.699.26.1	28		
390.703.14.1	19		
390.704.14.1	7		
390.705.14.1	7		
390.706.14.1	7		
390.707.14.1	7		
390.708.14.1	21		
390.716.14.1	20		
390.717.14.1	21		
390.718.14.1	20		
390.720.14.1	9		
390.721.14.1	9		
390.722.14.1	9		
390.723.14.1	9		
390.724.14.1	9		
390.727.14.1	19		
390.728.14.1	28		
390.735.14.1	10		
390.736.14.1	10		



**Geberit Sales Ltd**

Geberit House  
Edgehill Drive  
Warwick  
CV34 6NH

T 01926 516 800

F 01926 400 101

In Eire +44 (0)1926 516 800

Literature 0800 007 5133

enquiries@geberit.co.uk

[www.geberit.co.uk](http://www.geberit.co.uk)